



- ◆ For coaxial CCTV cables with BNC connectors, use ESP CCTV/B.
- ◆ For twisted pair CCTV lines, use ESP CCTV/T.
- ◆ Suitable for use on systems with either an earthed or an isolated screen.
- ◆ Not suitable for use on broadcast, satellite or cable TV systems.

### Application

Use these protectors on the video cable to outdoor CCTV cameras and central control and monitoring equipment.




CCTV camera protected from a direct lightning strike, by one of the building's 'lightning conductors', and from transient overvoltages by protectors in a WBX 4/GS secure enclosure.

### Features and benefits


- ✓ Low let-through voltage between all sets of conductors.
- ✓ Provides repeated protection in lightning intense environments.
- ✓ High bandwidth to prevent the degradation of high frequency signals.
- ✓ Low in-line resistance to minimise unnecessary reductions in signal strength and maximise signalling distance.
- ✓ Very low reflection coefficient/ VSWR ensure that the protector doesn't disrupt system operations.
- ✓ Suitable for either earthed or isolated screen systems.
- ✓ Sturdy, conductive ABS housing for 2 way shielding - preventing emissions and providing signals with immunity from external interference.
- ✓ Convenient holes for flat mounting on base or side.
- ✓ Built-in DIN rail foot for easy installation on top hat DIN rail.
- ✓ ESP CCTV/T has colour coded terminals for a quick and easy installation check - grey for the dirty (line) end and green for the clean end.
- ✓ Substantial earth stud to enable effective earthing.
- ✓ Integral earthing plate enables enhanced connection to earth via CME kit.

Camera telemetry or control lines should be protected with a suitable Lightning Barrier from the D or E Series. Protectors for the power supply to individual cameras and the mains supply to the control room are available. Protectors for coaxial RF cable (RF Series) and CATV systems (ESP CATV/F) are also available.

### Installation

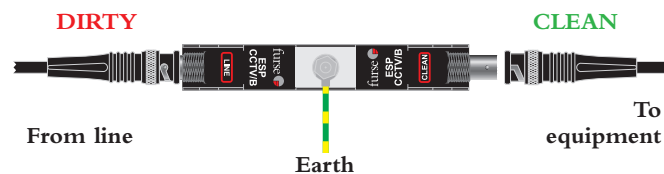

Series connection for ESP CCTV/B.

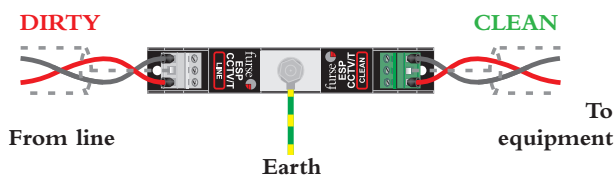

Series connection for ESP CCTV/T.

Connect in series with the CCTV cable in a convenient place close to the equipment being protected. For outdoor CCTV cameras, protectors should be mounted in the junction box, or in a separate enclosure, close to the camera. Protect central control and monitoring equipment inside the building by installing protectors on all incoming or outgoing lines, either:


- a) near where they enter or leave the building, or
- b) close to the equipment being protected (or actually within its control panel).



Protectors for the video (ESP CCTV/B, left), camera telemetry (ESP 15E, centre) and the low current mains power (ESP 240-5A, right) inputs to a camera, installed together on a CME 4 mounting and earthing kit. Note that the protectors have been cross bonded to the metal work of the pole (out of shot).

### Suitable accessories

When CCTV protectors are installed in groups, or alongside protectors for signal and mains power lines, these can be simultaneously mounted and earthed on a CME kit. A CME 4 will accommodate the video, telemetry and power protectors to a camera. If protectors cannot be incorporated within an existing panel or enclosure, WBX enclosures are available for up to 4, 8 or 16 protectors and their associated CME kit. The WBX 4/GS is a secure IP66 enclosure suitable for a CME 4 and associated protectors.



A group of ESP CCTV/B protectors installed together on a CME 8 combined mounting and earthing kit, on video cables entering the control and monitoring room.

Electrical specification

	ESP CCTV/B	ESP CCTV/T
<b>Nominal voltage<sup>1</sup></b> (peak - peak)	1V	2V
<b>Maximum working voltage<sup>2</sup></b> (peak)	6.45V	6.45V
<b>Current rating</b> (signal)	300mA	300mA
<b>In-line resistance</b> ( $\pm 10\%$ )	1 $\omega$ inserted in coax inner	1 $\omega$ per line
<b>Bandwidth</b> (-3dB 75 $\omega$ system) <sup>3</sup>	>20MHz	>20MHz
<b>Voltage standing wave ratio</b>	<1.2	<1.2

1 Nominal voltage (DC or AC peak) measured at <1 $\mu$ A leakage.  
 2 Maximum working voltage (DC or AC peak) measured at 10mA leakage.  
 3 Capacitance <30pF.

Transient specification

	ESP CCTV/B	ESP CCTV/T
<b>Let-through voltage (all conductors)<sup>1</sup></b> 5kV, 10/700 $\mu$ s test to: <i>BS 6651:1999 Appendix C, Cat C-High</i> <i>ITU (formerly CCITT) IX K17</i>	17V	17V
<b>Maximum surge current<sup>2</sup></b>	10kA	10kA

1 The maximum transient voltage let-through the protector throughout the test ( $\pm 10\%$ ), line to line & line to earth. Screen to earth let-through voltage will be 600V, when protector is configured for use with non-earthed or isolated screen systems. Response time <10ns.  
 2 Tested with 8/20 $\mu$ s waveshape to ITU (formerly CCITT), BS 6651:1999 Appendix C.

Mechanical specification

	ESP CCTV/B	ESP CCTV/T
<b>Temperature range</b>	-25°C to +70°C	-25°C to +70°C
<b>Connection type</b>	Coaxial BNC female	Screw terminal
<b>Conductor size</b> (stranded)	Not applicable	1.5mm <sup>2</sup>
<b>Earth connection</b>	M6 stud	M6 stud
<b>Weight</b> - unit - packaged (per 10)	0.08kg 0.9kg	0.08kg 0.9kg
<b>Dimensions</b>		