

6300 and 6320D

Visible Spectrophotometers

The 6300 is a high quality, low cost unit for spectrophotometric applications in schools and colleges, as well as in QC and testing procedures for a wide variety of services and industries. The 6320D is based on the 6300 platform and includes a domed lid which accepts taller tubes up to a height of 105mm.

Technical Specification

Wavelength

Range	320 to 1000nm
Resolution	1nm
Accuracy	±2nm
Spectral bandwidth	8nm

Photometrics

Transmittance	0 to 199.9%T
Absorbance	-0.300 to 1.999A
Accuracy	±1%T
Resolution	0.1%T, 0.001A
Stray light	<0.5%T
Noise	<1%
Stability	1%/h after 15 minutes

Concentration


Range	-300 to 1999
Resolution	0.1 to 1
Units	ppm, mg/l, g/l, M, %, blank
Factor	0 to 199.9, 1000 to 9999

Other

Light source	Tungsten halogen lamp
Outputs	Analogue and RS232
Power	<50W*
Size (w x d x h), mm	365 x 272 x 160
Weight, kg	6

Key Features

- Wavelength range of 320 to 1000nm
- Absorbance, %T and concentration modes
- Multi-parameter display with wavelength and photometric readouts
- Wide range of sampling accessories
- Domed lid of 6320D accepts tubes up to 105mm tall
- 3 year warranty

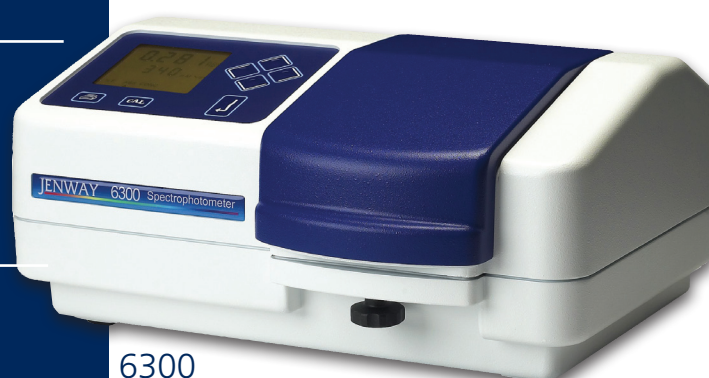

6300

Part code: 630 501



6320

Part code: 632 501

Ordering Information

Part Code	Description
630 501	6300 visible spectrophotometer supplied with mains lead, pack 100 disposable cuvettes, 10 x 10mm cell holder, interface cable and 63-Zero PC application software on CD-ROM** (230V/50Hz)
632 501	6320D visible spectrophotometer supplied with mains lead and dual cell holder (for 10mm square cuvettes and 12.7mm diameter tubes) (230V/50Hz)

* Voltage variants available see page 94

** Requires free on-line registration



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.