

# T4

## Portable Multigas Detector



- Carbon monoxide
- Hydrogen sulphide
- Oxygen
- Flammable gases



# T4

## Portable Multigas Detector

When lives and property are at risk and you need gas detection equipment that is totally reliable, you need Crowcon. For over 45 years Crowcon has been developing and manufacturing high quality products with a reputation for reliability and technical innovation.

Crowcon provide both single gas and multigas monitors for personal monitoring and portable safety applications, providing protection against a wide range of industrial gas hazards. Models vary, but it is Crowcon's philosophy that each should be properly suited to its task.

T4 offers you compliance, robustness and a low cost of ownership in a simple to use solution.



## Choosing the portable gas detector for your needs

T4 integrates innovative safety features and an intuitive, rugged design to provide advanced protection for those working in harsh environments. This portable multigas detector, which is exceptionally easy to use and service, protects against the four most prevalent gas hazards: **carbon monoxide** (CO), **hydrogen sulphide** (H<sub>2</sub>S), **flammable** gases and **oxygen** (O<sub>2</sub>) depletion.



# Confidence, however you look at it

T4 contains a wide range of features to make everyday use easier and safer:

## TWA Resume function

Unique to T4, this innovative feature ensures toxic gas exposure is calculated accurately over an entire shift, even if T4 is switched off for a break or during travel to another site.

## 24 hour battery life

Safely work multiple or longer shifts between charges, covered by the exceptional 24 hour battery life.

## Backlit display

Large, clear display with backlight and option to flip the screen 180° for easy viewing whilst worn.



## Rugged design

With a thick anti-shock rubber casing and drop tested to 4 metres on concrete, T4 provides dependable operation under the most demanding use. Water & dust resistant to IP65 & IP67.

## Positive Safety indicator

A simple 'traffic light' status indicator which, at a glance, provides visual assurance of operational and compliance status to both users and supervisors.

Green light - Working safely

Red light - Attention required



## Intrinsically safe

Approved for ATEX Zone 0 and UL Class 1 Div 1 for operation in the widest range of environments.



## Dedicated sensors


One sensor for every gas ensures effective, fast and reliable detection.

## Multiple alarms

Audible 95dB alarm, bright red/blue LED's and vibrating alerts provide effective warning to gas hazards.

## Easy operation

Large single button and intuitive menu system minimise training and allow easy operation whilst wearing gloves.

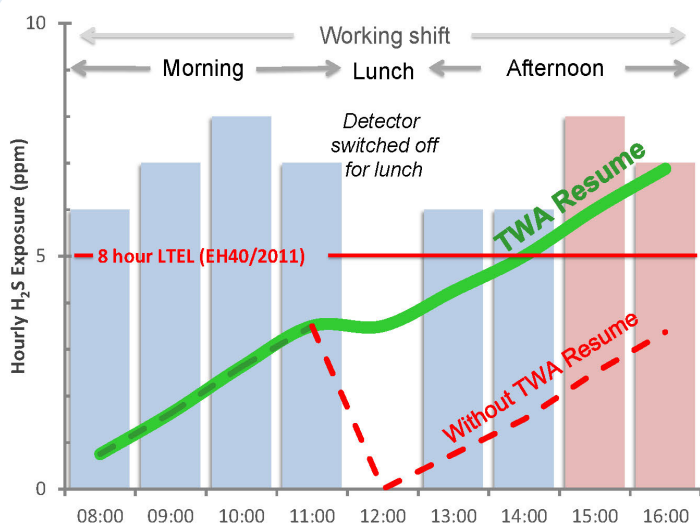

## TWA Resume

TWA Resume\* ensures time weighted average (TWA) toxic gas exposure is calculated accurately over an entire work shift.

The red line on the graph shows workers with other detectors risking overexposure to hydrogen sulphide (H<sub>2</sub>S) by switching their detector off for a lunch break.

Only T4 provides the option to include previous measurements in the calculation when you switch your detector back on again and so prevent you exceeding your exposure limit. Because of TWA Resume (green line), T4 alarms at 14:00 when their 8 hour TWA reaches 5ppm.

\* Patent pending - UK patent application number 1501699.1

Product Specification

Size		135 x 80 x 35mm (5.3 x 3.1 x 1.4in)
Weight		282g (9.9oz)
Durability		Drop tested 4m onto concrete
Alarms	Audible Vibrating Visible	95dB Integrated Bright red & blue LED's
Display		Front mounted, backlit, 180° flip for easy viewing while worn
Logging	Data Events	130 hours of data at 10s intervals 3,500
Battery	Rechargeable Li-ion	24 hour typical runtime; 5.5 hour recharge
Environment	Operating temp Humidity Ingress protection	-20 to +55°C (-4°F to +131°F)* 10-95% RH @ 40°C non-condensing Independently tested to IP65 and IP67
Compliance	EMC	Directive 2004/108/EC
Approvals	ATEX IECEx UL  INMETRO	Ex II 1 G Ex ia IIC T4 Ga Tamb -20°C to +55°C Ex ia IIC T4 Ga Tamb -20°C to +55°C Use in hazardous locations Class 1 Div 1 groups A,B,C,D only as to intrinsic safety Ex ia IIC T4 Ga Tamb -20°C to +55°C
Accessories	Included with T4	Integrated alligator clip and tethering loop Bump/calibration plate
	Available separately	Single unit cradle charger; 10 unit cradle charger; Vehicle charger Clip on dust filter plate I-Test automated bump test and calibration station

\*Toxic and oxygen sensors are not rated for continuous operation above 50°C (122°F)

Product variants and options:

	2 gas	3 gas - H <sub>2</sub> S	3 gas - CO	3 gas - CO (H <sub>2</sub> immune)	4 gas	4 gas (H <sub>2</sub> immune)
Oxygen (O <sub>2</sub> )	●	●	●	●	●	●
Flammable	●	●	●	●	●	●
Hydrogen sulphide (H <sub>2</sub> S)		●			●	●
Carbon monoxide (CO)			●		●	
Carbon monoxide (CO) - H <sub>2</sub> immune				●		●

Gases and Ranges:

Gas	Range	Resolution
Oxygen (O <sub>2</sub> )	0-30% vol.	0.1% vol.
Flammable	0-100% LEL	1% LEL
Hydrogen sulphide (H <sub>2</sub> S)	0-100ppm	1ppm
Carbon monoxide (CO)	0-1000ppm	1ppm

Crowcon reserves the right to change the design or specification of the product without notice.

T4 Accessories:



**Cradle charger**  
Docking station for easy charging



**10 way charger**  
For charging and storing your T4 fleet



**Vehicle charger**  
Effective charging and storage whilst travelling



**External filter plate**  
Clip-on filter for dusty environments



**I-Test**  
Easy automated bump testing and calibration solution



**USB communications lead**



**Bump/calibration plate**  
To apply test gas to T4



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



**UK Office**

**Keison Products,**

**P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.**

**Tel: +44 (0)330 088 0560**

**Fax: +44 (0)1245 808399**

**Email: [sales@keison.co.uk](mailto:sales@keison.co.uk)**

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.