

EME3 and EMEA3 Series

3 Recess Multi-Mantles

The Multi-Mantle with three recesses has a built-in electronic controller and offers a choice of heater only (EME3) or heater/stirrer (EMEA3) combination models. The vented case's unique air flow ensures that the case remains "cool-to-touch".

For both heater only and heater/stirrer models

- Individual built-in solid state electronic controls enable easy regulation of the heater, while removing sparking associated with mechanical switching
- 3 x 12.7mm diameter support rods are included
- Round bottom flask capacity from 100ml to 1000ml at all 3 positions
- Top cover is polypropylene and external surfaces are powder coated giving good general chemical resistance
- Coiled heating element is suspended within a thermal insulating cartridge to provide maximum heat transfer and support.
- Earth (ground) screen encloses the heater for added safety
- Individual heater cartridges are replaceable
- Neon lamps indicate when power is on and supplied to heaters and supplied to stirrers

Additionally for heater/stirrer EMEA3 models


- Heater/stirrer model allows the solution to be stirred and heated simultaneously
- Stirrer models provide a choice of stirring speeds of between 50 to 1000rpm
- One stirring control operates each set of three recesses

Technical Specification

Material	Polypropylene top on powder-coated aluminium
Max element temperature	450°C



EME3

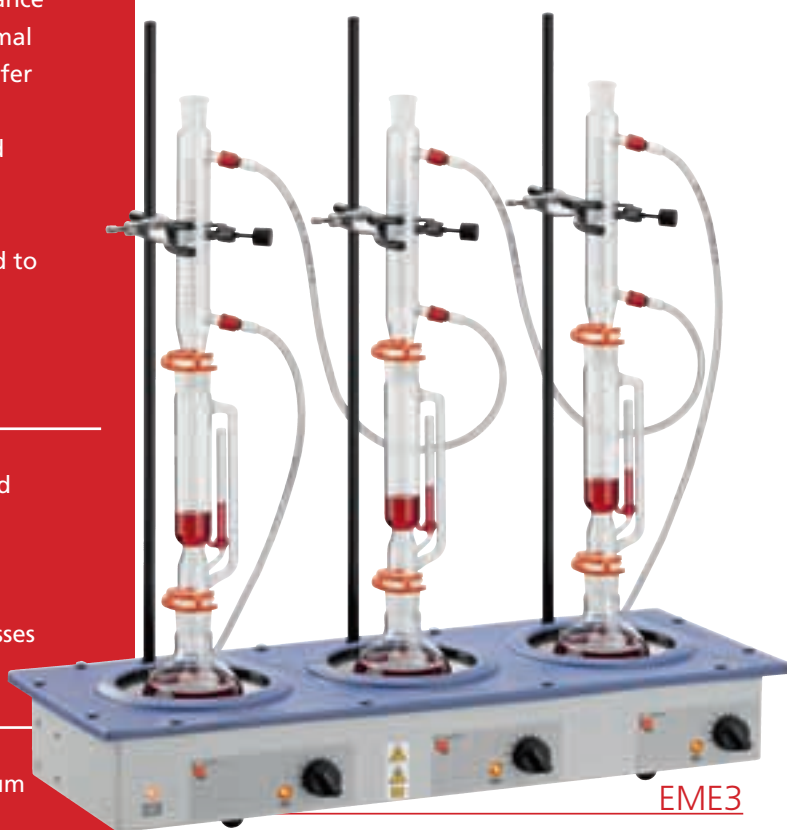

EME3

Ordering Information

Heater models

Model	No. of Recesses	Flask Capacity	Electrical Requirements	Dimensions (d x w x h), mm	Shipping Weight
EME3 0100/CEB	3	3 x 100ml	230V 50/60Hz, 180W	260 x 630 x 90	6.2kg
EME3 0100/CEBX1	3	3 x 100ml	115V 50/60Hz, 210W	260 x 630 x 90	6.2kg
EME3 0100/CEBX6	3	3 x 100ml	230V 50/60Hz, 180W, EU Plug	260 x 630 x 90	6.2kg
EME3 0250/CEB	3	3 x 250ml	230V 50/60Hz, 450W	260 x 630 x 90	6.2kg
EME3 0250/CEBX1	3	3 x 250ml	115V 50/60Hz, 450W	260 x 630 x 90	6.2kg
EME3 0250/CEBX6	3	3 x 250ml	230V 50/60Hz, 450W, EU Plug	260 x 630 x 90	6.2kg
EME3 0500/CEB	3	3 x 500ml	230V 50/60Hz, 600W	260 x 630 x 90	7.4kg
EME3 0500/CEBX1	3	3 x 500ml	115V 50/60Hz, 600W	260 x 630 x 90	7.4kg
EME3 0500/CEBX6	3	3 x 500ml	230V 50/60Hz, 600W, EU Plug	260 x 630 x 90	7.4kg
EME3 1000/CEB	3	3 x 1000ml	230V 50/60Hz, 900W	260 x 630 x 90	7.4kg
EME3 1000/CEBX1	3	3 x 1000ml	115V 50/60Hz, 900W	260 x 630 x 90	7.4kg
EME3 1000/CEBX6	3	3 x 1000ml	230V 50/60Hz, 900W, EU Plug	260 x 630 x 90	7.4kg

Ordering Information

Heater/Stirrer models

Model	No. of Recesses	Flask Capacity	Electrical Requirements	Dimensions (d x w x h), mm	Shipping Weight
EMEA3 0100/CE	3	3 x 100ml	230V 50/60Hz, 220W	260 x 630 x 90	6.2kg
EMEA3 0100/CEX1	3	3 x 100ml	115V 50/60Hz, 220W	260 x 630 x 90	6.2kg
EMEA3 0100/CEX6	3	3 x 100ml	230V 50/60Hz, 220W, EU Plug	260 x 630 x 90	6.2kg
EMEA3 0250/CE	3	3 x 250ml	230V 50/60Hz, 490W	260 x 630 x 90	6.2kg
EMEA3 0250/CEX1	3	3 x 250ml	115V 50/60Hz, 490W	260 x 630 x 90	6.2kg
EMEA3 0250/CEX6	3	3 x 250ml	230V 50/60Hz, 490W, EU Plug	260 x 630 x 90	6.2kg
EMEA3 0500/CE	3	3 x 500ml	230V 50/60Hz, 640W	260 x 630 x 90	7.4kg
EMEA3 0500/CEX1	3	3 x 500ml	115V 50/60Hz, 640W	260 x 630 x 90	7.4kg
EMEA3 0500/CEX6	3	3 x 500ml	230V 50/60Hz, 640W, EU Plug	260 x 630 x 90	7.4kg
EMEA3 1000/CE	3	3 x 1000ml	230V 50/60Hz, 940W	260 x 630 x 90	7.4kg
EMEA3 1000/CEX1	3	3 x 1000ml	115V 50/60Hz, 940W	260 x 630 x 90	7.4kg
EMEA3 1000/CEX6	3	3 x 1000ml	230V 50/60Hz, 940W, EU Plug	260 x 630 x 90	7.4kg

EME6 and EMEA6 Series

6 Recess Multi-Mantles

The Multi-Mantle with 6 recesses has a built-in electronic controller and offers a choice of heater only (EME6) or heater/stirrer (EMEA6) combination models.

The vented case's unique air flow ensures that the case remains "cool-to-touch".

For both heater only & heater/stirrer models

- Individual built-in solid state electronic controls enable easy regulation of heater, while removing sparking associated with mechanical switching
- 3 x 12.7mm diameter support rods are included
- Round bottom flask capacity from 100ml to 1000ml at all 6 positions
- Top cover is polypropylene and external surfaces are powder coated giving good general chemical resistance
- Coiled heating element is suspended within a thermal insulating cartridge to provide maximum heat transfer and support
- Earth (ground) screen encloses the heater for added safety
- Individual heater cartridges are replaceable
- Neon lights indicate when power is on and supplied to heaters and supplied to stirrers

Additionally for heater/stirrer EMEA6 models


- Heater/stirrer model allows the solution to be stirred and heated simultaneously
- Includes a choice of stirring speeds of between 50 to 1000rpm
- One stirring control operates each set of six recesses

Technical Specification

Material	Polypropylene top on powder-coated aluminium
Max element temperature	450°C



EME6

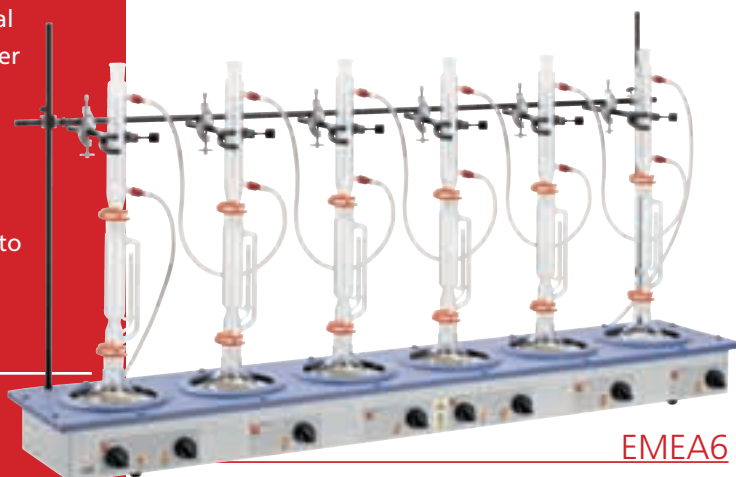

EMEA6

Ordering Information

Heater models

Model	No. of Recesses	Flask Capacity	Electrical Requirements	Dimensions (d x w x h), mm	Shipping Weight
EME6 0100/CEB	6	6 x 100ml	230V 50/60Hz, 420W	260 x 1200 x 90	10.1kg
EME6 0100/CEBX1	6	6 x 100ml	115V 50/60Hz, 360W	260 x 1200 x 90	10.1kg
EME6 0100/CEBX6	6	6 x 100ml	230V 50/60Hz, 420W, EU Plug	260 x 1200 x 90	10.1kg
EME6 0250/CEB	6	6 x 250ml	230V 50/60Hz, 900W	260 x 1200 x 90	10.1kg
EME6 0250/CEBX1	6	6 x 250ml	115V 50/60Hz, 900W	260 x 1200 x 90	10.1kg
EME6 0250/CEBX6	6	6 x 250ml	230V 50/60Hz, 900W, EU Plug	260 x 1200 x 90	10.1kg
EME6 0500/CEB	6	6 x 500ml	230V 50/60Hz, 1200W	260 x 1200 x 90	12.5kg
EME6 0500/CEBX1	6	6 x 500ml	115V 50/60Hz, 1200W	260 x 1200 x 90	12.5kg
EME6 0500/CEBX6	6	6 x 500ml	230V 50/60Hz, 1200W, EU Plug	260 x 1200 x 90	12.5kg
EME6 1000/CEB	6	6 x 1000ml	230V 50/60Hz, 1800W	260 x 1200 x 90	12.5kg
EME6 1000/CEBX1	6	6 x 1000ml	115V 50/60Hz, 1800W	260 x 1200 x 90	12.5kg
EME6 1000/CEBX6	6	6 x 1000ml	230V 50/60Hz, 1800W, EU Plug	260 x 1200 x 90	12.5kg

Ordering Information

Heater/Stirrer models

Model	No. of Recesses	Flask Capacity	Electrical Requirements	Dimensions (d x w x h), mm	Shipping Weight
EMEA6 0100/CE	6	6 x 100ml	230V 50/60Hz, 500W	260 x 1200 x 90	10.1kg
EMEA6 0100/CEX1	6	6 x 100ml	115V 50/60Hz, 440W	260 x 1200 x 90	10.1kg
EMEA6 0100/CEX6	6	6 x 100ml	230V 50/60Hz, 500W, EU Plug	260 x 1200 x 90	10.1kg
EMEA6 0250/CE	6	6 x 250ml	230V 50/60Hz, 980W	260 x 1200 x 90	10.1kg
EMEA6 0250/CEX1	6	6 x 250ml	115V 50/60Hz, 980W	260 x 1200 x 90	10.1kg
EMEA6 0250/CEX6	6	6 x 250ml	230V 50/60Hz, 980W, EU Plug	260 x 1200 x 90	10.1kg
EMEA6 0500/CE	6	6 x 500ml	230V 50/60Hz, 1280W	260 x 1200 x 90	12.5kg
EMEA6 0500/CEX1	6	6 x 500ml	115V 50/60Hz, 1280W	260 x 1200 x 90	12.5kg
EMEA6 0500/CEX6	6	6 x 500ml	230V 50/60Hz, 1280W, EU Plug	260 x 1200 x 90	12.5kg
EMEA6 1000/CE	6	6 x 1000ml	230V 50/60Hz, 1880W	260 x 1200 x 90	12.5kg
EMEA6 1000/CEX1	6	6 x 1000ml	115V 50/60Hz, 1880W	260 x 1200 x 90	12.5kg
EMEA6 1000/CEX6	6	6 x 1000ml	230V 50/60Hz, 1880W, EU Plug	260 x 1200 x 90	12.5kg



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.