



Stainless Steel Relief Valves Dome Top - Screwed or Flanged Connections

Order Ref:	Metal Seat:	G36-M-DN-X
	TFM Seat:	G36-T-DN-X
	Viton Seat:	G36-V-DN-X
	Silicon Seat:	G36-SI-DN-X

DN = Size in mm

X = Spring Range (see Chart Over)

GRESSWELL G36 RELIEF VALVES

Side Outlet discharge with leak proof Dome Cover over the adjusting screw. These valves are commonly used for preventing a safe pressure being exceeded in pressurised systems.

The lift is proportional to the system overpressure.

SIZE RANGE

mm	15	20	25	40	50
ins	1/2	3/4	1	1 1/2	2

PIPE CONNECTIONS

Male Inlet x Female Outlet.


Standard valves are threaded BS 21:1985 Rp Parallel. Alternative thread standards, i.e. taper or NPT are available upon request.

Flanged connections also available. Most flange standards can be accommodated, e.g. ANSI, BS4504 - please specify requirements.



STANDARD SPECIFICATION

No.	Component	Material	No.	Component	Material
1	Dome Top	St. Steel BS970 Part 1 316 S11	6	Spring Plate	St. Steel BS970 Part 1 316 S11
2	Body	St. Steel ASTM A351/A351M CF8M	7	Spindle	St. Steel BS970 Part 1 316 S11
3	Base	St. Steel ASTM A351/A351M CF8M	8	Ball	St. Steel AISA 420
3T	TFM Seat	Dyneon™ TFM™ PTFE 1600	9	Valve	St. Steel BS1504 316 C16
3V	Viton Seat	Viton 85 Brown	10	Label	Metallised Polymer
3S	Silicone Seat	Silicone 50 Blue	11	Spring	St. Steel BS2056 302 S26
4	Adjusting Screw	St. Steel BS970 Part 1 316 S11	12	Washer	Fibre
5	Lock Nut	St. Steel BS970 Part 1 316 S11	13/14	Flanges (optional)	St. Steel BS970 Part 1 316 S11

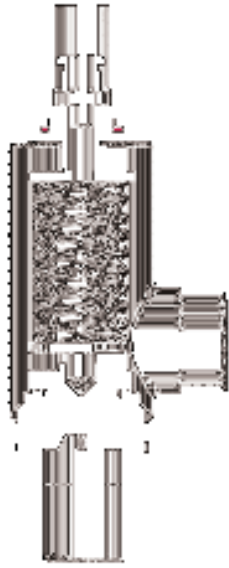

FEATURES & BENEFITS

Gresswell Valves are quality assurance approved to BS EN ISO 9001: 2000. Certificate No. 0910407.

Full Cat IV PED approval.

Only 4 springs are needed to cover the full pressure range.

Clear operating and maintenance instructions are supplied with each despatch.

Screwed/Flanged or a combination of both are available as standard.

See leaflet Ref: DC G36 for Discharge Capacities.

TESTING

All Gresswell Relief Valves are given a hydraulic seat tightness test before leaving the factory and the adjustment range is clearly marked.

All valves are supplied pre-set.

Flanged valves are pressure tested to ensure soundness of joints.

Special tests or witness testing can be arranged at extra cost.

DIMENSION CHART

Size	A	B	C	D	Weight (kg)
DN15	17	35	87	33	0.6
DN20	14	36	97	40	0.8
DN25	25	47	113	48	1.5
DN40	23	53	134	56	2.6
DN50	27	61	126	62	3.5

All dimensions in millimetres (mm)

Flange dimensions (available upon request) vary according to specification

SEAT TYPES - SPRING/PRESSURE RANGES

Seat Housing	Valve	Pressure Range	Temperature Range	Spring Ranges (bar & p.s.i.)			
				A (Low)	B (Medium)	C (High)	D (Special*)
316 St. Steel	316 St. Steel	to 21.0 bar (300 p.s.i.)	-60° to +350°C	0.2 - 3.5 (0 - 50)	3.5 - 10.5 (50 - 150)	10.5 - 21.0 (150 - 300)	N/A
316 St. Steel TFM insert	316 St. Steel	to 21.0 bar (300 p.s.i.)	-40° to +225°C	0.2 - 2.0 (0 - 30)	2.0 - 8.3 (30 - 120)	8.3 - 16.6 (120 - 260)	16.6 - 21.0 (260 - 300)
316 St. Steel Viton seal	316 St. Steel	to 21.0 bar (300 p.s.i.)	-15° to +200°C	0.2 - 2.0 (0 - 30)	2.0 - 8.3 (30 - 120)	8.3 - 16.6 (120 - 260)	16.6 - 21.0 (260 - 300)
316 St. Steel Silicone seal	316 St. Steel	to 21.0 bar (300 p.s.i.)	-15° to +180°C	0.2 - 2.0 (0 - 30)	2.0 - 8.3 (30 - 120)	8.3 - 16.6 (120 - 260)	16.6 - 21.0 (260 - 300)

*50mm only available for special orders.
32, 65 & 80mm not available.



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)1245 600560

Fax: +44 (0)1245 600030

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.