

Inspector EXP+

a β y X 

Now with a selectable alert, the Inspector EXP+ offers excellent sensitivity to low levels of alpha, beta, gamma, and x-rays. The digital readout is displayed with a red count light and a beeper sounds with each count detected.



Detector:

Halogen-quenched, uncompensated GM tube with thin mica window, 1.4-2.0 mg/cm² areal density with an Anodized aluminum housing with coated, black foam grip. 500-volt power supply is in the probe head.
Size- Approx. length: 22.2 cm (8.75 in.) Diameter: 7 cm (2.75 in.). Connector - Amphenol tuchel connectors

Accuracy

+/- 10% - 0 to 100 mR/hr (1-1000 μ Sv/hr) Ref. to Cs-137

Display

4 digit liquid crystal display with indicators.

Operating Range

μ Sv/hr - .01 to 1000 CPS - 0 to 5000
mR/hr - .001 (1 μ R) to 100 CPM - 0 to 350,000
Total/ Timer - 1 to 9,999,000 counts

Averaging periods

Display will update every 3 seconds. At low background levels, the update is the moving average for the past 30-second time period. The timed period for the moving average decreases as the radiation level increases.

Alert Set Range

mR/hr .001 - 50 and CPM 1 - 160,000

Gamma Sensitivity

3500 CPM/mR/hr referenced to Cs-137. Smallest detectable level for I-125 is .02 μ Ci at contact.

Timer

Can set 1 minute sampling periods from 1 to 10 minutes. 10 minute sampling periods 10- 60 minutes. 1 hour sampling periods from 1 to 24 hours.

Outputs

Dual miniature jack drives CMOS or TTL devices: count to computer or datalogger. Submini jack input allows for electronic calibration.

Power Requirements

9-volt battery life is min. 2160 hours at normal background radiation levels.

Temperature Range

-10°C to 50°C (14°F to 122°F).

Weight


880.2 grams (28.0 oz.) without battery.

Size

150 x 80 x 30 mm (5.9 x 3.3 x 1.2 in.).

Warranty

1 year limited, 90 day Warranty on GM Detector.

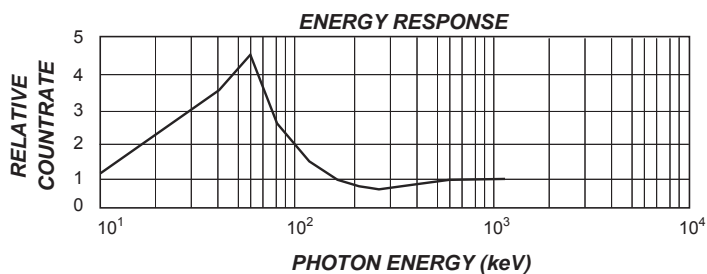

RADIATION[®]
A · L · E · R · T
QUALITY HANDHELD DETECTORS



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)1245 600560

Fax: +44 (0)1245 600030

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.