

Inspector+

a B y X 

Now with an adjustable alert, the Inspector+ is a small, handheld, microprocessor-based instrument which offers excellent sensitivity to low levels of alpha, beta, gamma, and x-rays. The digital readout is displayed with a red count light and a beeper sounds with each count detected. Other features include an adjustable timer, external calibration controls and selectable alert.

Detector

Internal Halogen-quenched, uncompensated GM tube with thin mica window, 1.4-2.0 mg/cm² areal density. Effective diameter of window is 45 mm (1.75 in.).

Operating Range

mR/hr - .001 (1 μ R) to 100 mR/hr CPM - 0 to 350,000
 μ Sv/hr - .01 to 1000 CPS - 0 to 5000
 Total/ Timer - 1 to 9,999,000 counts

Accuracy

mR/hr \pm 10% typical (NIST), \pm 15% max - 0 to 100
 μ Sv/hr \pm 10% typical (NIST), \pm 15% max - 01 - 1000
 CPM \pm 10% typical (NIST), \pm 15% max - 0 to 350,000
 (Referenced to Cs-137)

Alert Set Range

mR/hr .001 - 50 and CPM 1 - 160,000

Power Requirements

One 9-volt alkaline battery. 2160 hours at background.

Weight

Inspector: 275 grams (9.7 oz.) without battery.

Size

150 x 80 x 30 mm (5.9 x 3.3 x 1.2 in.).

Count Light

Red LED flashes with each radiation event.

Outputs

Dual miniature jack drives CMOS or TTL devices: count to computer or datalogger. Submini jack input allows for electronic calibration

Anti-Saturation

Meter holds full scale in fields as high as 100 times the maximum reading.

Temperature Range


-10°C to 50°C (14°F to 122°F)

Includes

Carrying Case, CE Certification

Warranty

1 year limited, 90 day Warranty on GM Detector.

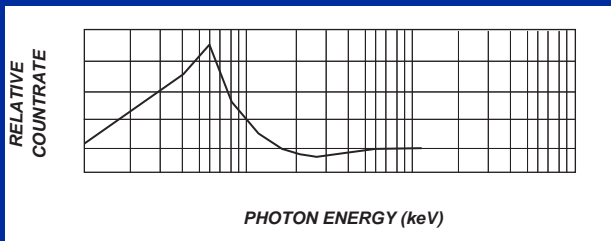

ACTUAL SIZE



RADIATION[®]
A · L · E · R · T
 QUALITY HANDHELD DETECTORS



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)1245 600560

Fax: +44 (0)1245 600030

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.