



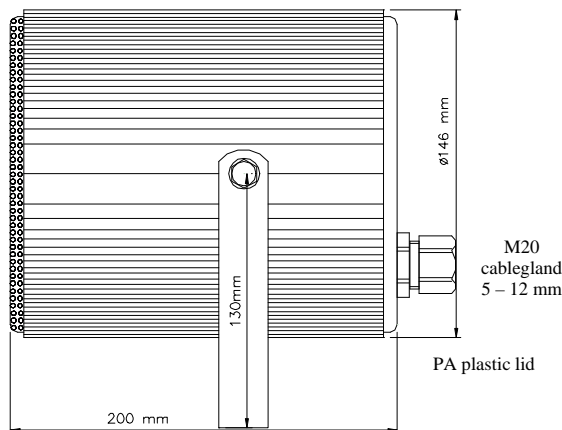


DNH

CAP-15W(T)

ISO 9001 CERTIFIED

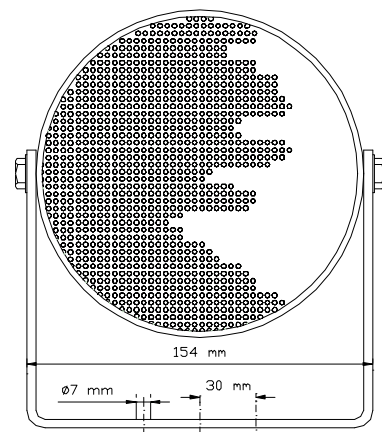


Circuit diagram

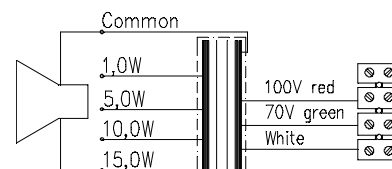

Secondary nominal tapings	
C : 15	15,0 W
C : 10	10,0 W
C : 5	5,0 W
C : 1	1,5 W

Sound pressure levels at 1W/1m P5/15T

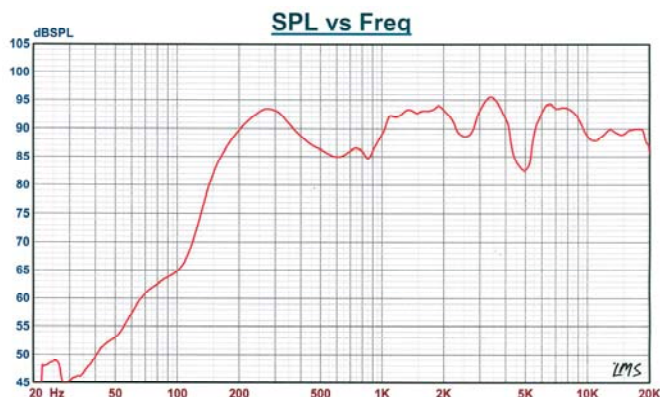

Specifications

Material / Color	Aluminum / RAL9010 or anodized
Mounting	Bracket
Termination	Internal chamber
Weight w/transformer	2,1 kg
IP-rating	55
Max. / min. amb. temp	90°C / -40°C
Rated / max. power	15 W / 20 W
SPL 1W/1m	92 dB
SPL rated power	103 dB
Effective freq. range	150 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	130° / 50°
Directivity factor, Q	15,8
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Fasten loudspeaker with 2 - 3 screws through bracket.
- Remove lid by 4 screws, lead cable through the cable gland and connect to terminal 70V (white – green) or 100V (white – red).
- Select required tapping in the transformer.
- Screw lid back into place by 4 screws with a torque of 1 - 2 Nm to assure the IP rating.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

DNH reserves the right to alter specifications without notice





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.