



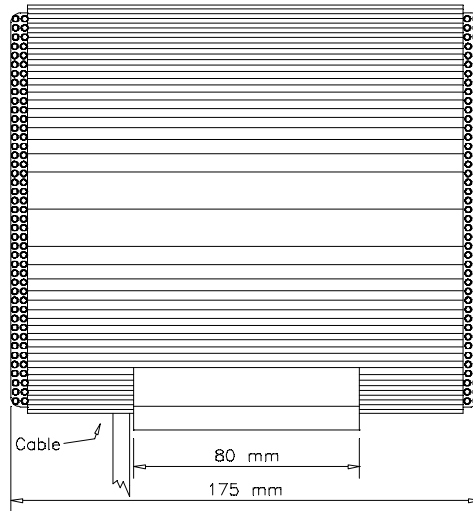


DNH

CAR-6(T)

ISO 9001 CERTIFIED

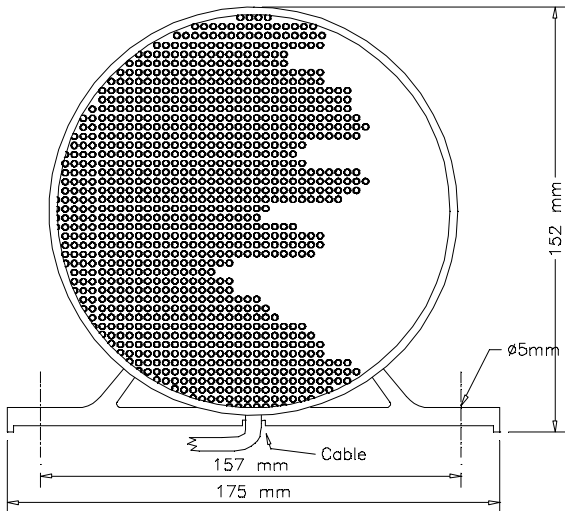

Circuit diagram




100 V Primary nominal tapings

Black : Red	6,0 W
Black : Yellow	3,0 W
Black : Green	1,5 W
Black : Blue	0,5 W

Sound pressure levels at 1W/1m P5/15T

SPL vs Freq

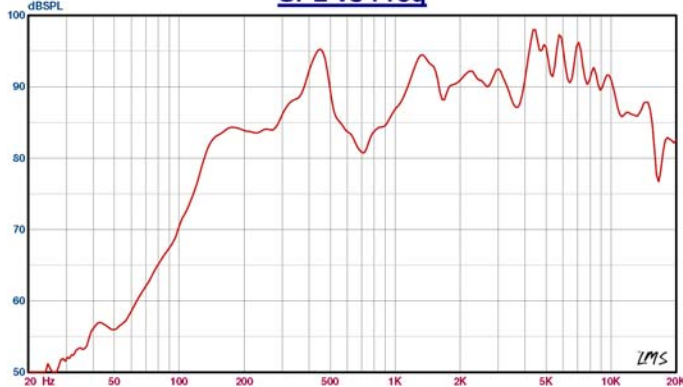

Specifications

Material / Color	Aluminum / RAL9010 or anodized
Mounting	Foot bracket
Termination	Cable, 1 m
Weight w/transformer	1,9 kg
IP-rating	NA
Max. / min. amb. temp	90°C / -40°C
Rated / max. power	6 W / 10 W
SPL 1W/1m	90 dB
SPL rated power	96 dB
Effective freq. range	150 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	150° / 150°
Directivity factor, Q	14,6
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Fasten loudspeaker with two screws through foot bracket.
- Select required tapping and connect with a suitable terminal.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

DNH reserves the right to alter specifications without notice





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.