


70/100 Volt combined transformer Primary connections	
White : Green	70 V
White : Red	100 V
Secondary nominal tapings	
1 : 4	50,0 W
1 : 3	27,0 W
2 : 4	18,0 W
1 : 2	15,0 W
3 : 4	7,5 W
2 : 3	3,5 W

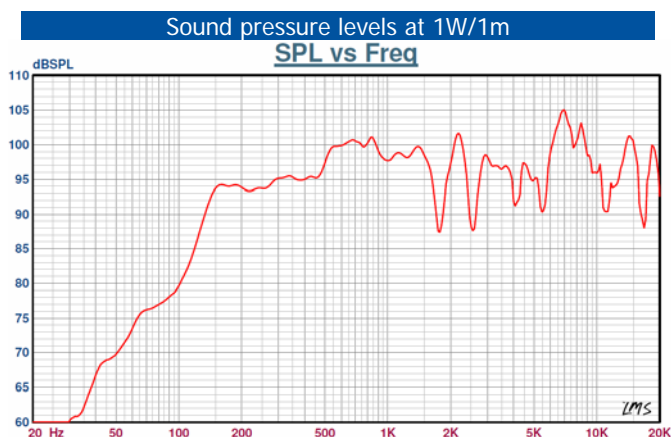

Specifications	
Material / Color	ABS , V0 / RAL 7035
Mounting	Bracket
Termination	Screw terminal in termination chamber
Weight w/transformer	6,2 Kg
IP-rating	54
Max. / min. amb. temp	90°C / -40°C
Rated / max. power	50 W / 70 W
SPL 1W/1m	98 dB
SPL rated power	115 dB
Effective freq. range	90 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	Horizontal 84°/105° Vertical 127°/105°
Directivity factor, Q	Horizontal 4,3 Vertical 2,8
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Unscrew lid, lead cable through cable gland and connect to terminal according to required power.
- Tighten cable gland and fasten termination chamber lid with a torque of 1-2 Nm to assure IP grade.
- Fasten the bracket to wall or ceiling with three screws.
- To change the position of the loudspeaker, please adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a two years warranty against defective workmanship.



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.