




Earth boss

Length	Diameter	Thread size	Material	Weight each	Part No.	
25 mm	25 mm	M8	Mild steel	0.11 kg	EB0000	NEW
25 mm	25 mm	M8	Stainless steel	0.11 kg	EB1000	NEW
30 mm	30 mm	M8	Mild steel	0.18 kg	EB0110	NEW
30 mm	30 mm	M8	Stainless steel	0.18kg	EB1110	NEW
30 mm	30 mm	M10	Mild steel	0.20 kg	EB0111	NEW
30 mm	30 mm	M10	Stainless steel	0.20 kg	EB1111	NEW
30 mm	40 mm	M8	Mild steel	0.24 kg	EB0120	NEW
30 mm	40 mm	M8	Stainless steel	0.24 kg	EB1120	NEW
30 mm	40 mm	M10	Mild steel	0.26 kg	EB0121	NEW
30 mm	40 mm	M10	Stainless steel	0.26kg	EB1121	NEW
30 mm	50 mm	M8	Mild steel	0.29 kg	EB0130	NEW
30 mm	50 mm	M8	Stainless steel	0.29 kg	EB1130	NEW
30 mm	50 mm	M10	Mild steel	0.31 kg	EB0131	NEW
30 mm	50 mm	M10	Stainless steel	0.31 kg	EB1131	NEW
40 mm	30 mm	M10	Mild steel	0.33 kg	EB0211	NEW
40 mm	30 mm	M10	Stainless steel	0.33 kg	EB1211	NEW
40 mm	30 mm	M12	Mild steel	0.36 kg	EB0212	NEW
40 mm	30 mm	M12	Stainless steel	0.36 kg	EB1212	NEW
40 mm	40 mm	M10	Mild steel	0.43 kg	EB0221	NEW
40 mm	40 mm	M10	Stainless steel	0.43 kg	EB1221	NEW
40 mm	40 mm	M12	Mild steel	0.45 kg	EB0222	NEW
40 mm	40 mm	M12	Stainless steel	0.45 kg	EB1222	NEW
40 mm	50 mm	M10	Mild steel	0.53 kg	EB0231	NEW
40 mm	50 mm	M10	Stainless steel	0.53 kg	EB1231	NEW
40 mm	50 mm	M12	Mild steel	0.55 kg	EB0232	NEW
40 mm	50 mm	M12	Stainless steel	0.55 kg	EB1232	NEW
50 mm	30 mm	M10	Mild steel	0.50 kg	EB0311	NEW
50 mm	30 mm	M10	Stainless steel	0.50 kg	EB1311	NEW
50 mm	30 mm	M12	Mild steel	0.52 kg	EB0312	NEW
50 mm	30 mm	M12	Stainless steel	0.52 kg	EB1312	NEW
50 mm	40 mm	M10	Mild steel	0.65 kg	EB0321	NEW
50 mm	40 mm	M10	Stainless steel	0.65 kg	EB1321	NEW
50 mm	40 mm	M12	Mild steel	0.67 kg	EB0322	NEW
50 mm	40 mm	M12	Stainless steel	0.67 kg	EB1322	NEW
50 mm	50 mm	M10	Mild steel	0.80 kg	EB001	
50 mm	50 mm	M10	Stainless steel	0.80 kg	EB1331	NEW
50 mm	50 mm	M12	Mild steel	0.80 kg	EB0332	NEW
50 mm	50 mm	M12	Stainless steel	0.80 kg	EB1332	NEW



EB001





Earth boss manufactured from mild steel (to 970 230M07 grade EN1A) or stainless steel (grade 316L) complete with phosphor bronze studs, nuts and washers.

For welding to steel vessels, tanks, structures etc. Wrap connections with Denso tape (see page 74).

Insulator



IN013

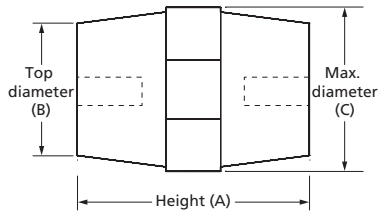

	Height (A)	Top Diameter (B)	Maximum diameter (C)	Insert size (D)	For copper bar size	Part No.
Insulator						
NEW	20 mm	14 mm	18 mm	M6	25 x 3 mm	IN020
NEW	30 mm	25 mm	33 mm	M6	25 x 6 mm	IN030
NEW	40 mm	31 mm	39 mm	M8	38 x 6 mm	IN040
	50 mm	27 mm	35 mm	M10	50 x 6 mm	IN013
NEW	60 mm	38 mm	52 mm	M10	75 x 6 mm	IN060
NEW	70 mm	51 mm	55 mm	M12	100 x 6 mm	IN070

Insulator with 2 studs and 3 nuts

50 mm	27 mm	35 mm	M10	50 x 6 mm	IN005
-------	-------	-------	-----	-----------	-------

Insulator manufactured from grey GRP material with brass insert.



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.