

Aqua Pro range

3

year warranty



Motion Pro™ - reliable shaking, secure samples



Three models

OLS26 A combined orbital / linear shaking bath for ultimate flexibility and usability


26L



LSB12
LSB18 Excellent usability for all general applications

12L

18L

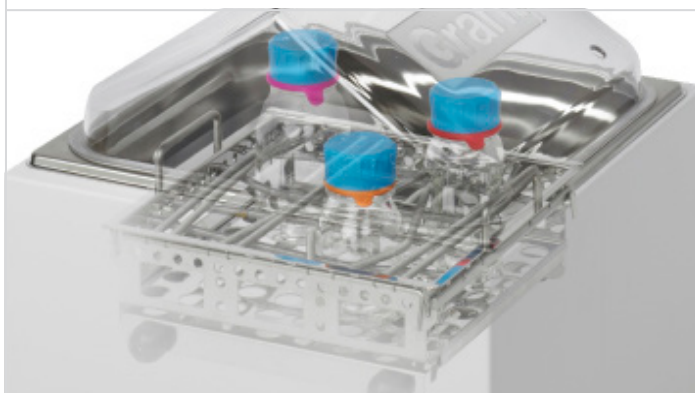

Applications

- Life-science - cell cultivation, incubating bacterial cultures, enzyme assays
- Industrial - textile testing, sample QC, sample mixing
- Biopharm - solubility testing, dissolution
- Food & beverage - food digestion, extractions

Ideal for general laboratory use, life-sciences & industry

OLS Aqua Pro - orbital and linear shaking bath



Amb +5 to 99°C.



Sub ambient cooling option

Orbital / Linear

Adjustable shaking intensity

- UNIQUE** › Combined orbital / linear motion in one bath, simply rotate tray carrier 180°
- PRECISE** › Excellent temperature stability and uniformity of $\pm 0.1^{\circ}\text{C}$
- FLEXIBLE** › Adjustable shaking speed/intensity for application optimisation
- ACCURATE** › Set and Forget™ technology - fast heat-up accurate temperature control
- VERSATILE** › Extensive choice of trays for a wide variety of vessels. Trays sold separately
- ADVANCED** › Includes adjustable high temp cut-off/alarm, countdown timer, presets, calibration facility and dry start/run dry protection
- PRACTICAL** › Discreet magnetically coupled shaking mechanism maximises working area

Specifications

	<p>OLS26</p> <p>13.8 kg h: 325 mm d: 565 mm w: 335 mm</p> 
Tank size	26L
Minimum working depth	70 mm
Temperature range	ambient +5 to 99°C. 0 to 99°C with accessory cooling
Uniformity (DIN 12876-3) @ 70°C	$\pm 0.1^{\circ}\text{C}$
Stability (DIN 12876-3) @ 70°C	$\pm 0.1^{\circ}\text{C}$
Display	2 x LED (individual displays & controls for temperature and shaking speed)
Orbital and Linear shaking speed	20-200 rpm (depending on load)
Orbital shaking radius	9 mm
Shaking speed display resolution	1 rpm
Linear shaking stroke length	18, 28 & 36 mm
Shaking tray area	380 x 235 mm
Timer	1 to 999 mins
Drain Tap	yes
Safety	over-temperature protection / low liquid level cut-out
Supply voltage	110-120V or 220-230V

Note: Accessory tray must be ordered separately

LSB Aqua Pro - linear shaking baths



Amb +5 to 99°C.

Linear

12L and 18L size options

- CONSISTENT** › Reliable linear shaking mechanism for consistent results
- PRECISE** › Excellent temperature stability and uniformity of $\pm 0.1^{\circ}\text{C}$
- INTUITIVE** › Simple controls, clear, bright display
- ACCURATE** › Set and Forget™ technology - fast heat-up accurate temperature control
- VERSATILE** › Extensive choice of trays for a wide variety of vessels. Trays sold separately
- PRACTICAL** › Discreet magnetically coupled shaking mechanism maximises working area
- VALUE** › Advanced dry start / run dry protection – prevents costly service repairs

Specifications



LSB12

9.2 kg
h: 275 mm
d: 380 mm
w: 360 mm



LSB18

11.2 kg
h: 275 mm
d: 565 mm
w: 335 mm



	12L	18L
Tank size	12L	18L
Minimum working depth	60 mm	
Temperature range	ambient +5 to 99°C	
Uniformity (DIN 12876-3) @ 70°C	$\pm 0.1^{\circ}\text{C}$	
Stability (DIN 12876-3) @ 70°C	$\pm 0.1^{\circ}\text{C}$	
Display	LED	
Linear shaking speed	20-200 rpm (depending on load)	
Shaking speed display resolution	1 rpm	
Linear shaking stroke length	20 mm	
Shaking tray area	240 x 235 mm	420 x 235 mm
Timer	1 to 999 mins	
Drain tap	yes	
Safety	over-temperature protection / low liquid level cut-out	
Supply voltage	110-120V or 220-230V	

Note: Accessory tray must be ordered separately

Accessories LSB and OLS Aqua Pro

Product / description	OLS26	LSB12	LSB18
 <p>Universal tray - with adjustable springs. Highly versatile for a variety of vessel types.</p>	TU26	TU12	TU18
 <p>Flask / plate tray - with threaded holes to accept flask clamps or holder for deep well plates ($\geq 2\text{ml}$). See options below.</p>	TF26	TF12	TF18
 <p>Test tube tray - compatible with SR racks or can be used alone to accommodate bags and miscellaneous vessels. See rack options below.</p>	TS26 (holds up to 5 SR racks)	TS12 (holds up to 3 SR racks)	TS18 (holds up to 5 SR racks)
 <p>Base tray - perforated stainless steel, allows bath to be used as an unstirred bath.</p>	SBT26	SBT12	SBT26
 <p>Cooling coil - source of constant cooling to enable bath to be operated at or below ambient, down to 0°C. LS200 lid (with access hole for cooling coil) recommended.</p>	CC26	-	-
 <p>Heat exchange coil - attach to a cold water supply or refrigerated circulator. Can be used down to 2°C above the temperature of the coolant. LS200 lid (with access hole for cooling coil) recommended.</p>	CW26	-	-

Flask clamps and plate holder

Part number	Description	TF12 Capacity	TF18 Capacity	TF26 Capacity
SC-25	for 25ml flask	18	33	28
SC-50	for 50ml flask	14	26	24
SC-100	for 100ml flask	9	17	15
SC-250	for 250ml flask	5	14	8
SC-500	for 500ml flask	4	6	6
SC-1000	for 1000ml flask	2	4	3
SH-DWP	for 1 x deep well plate ($\geq 2\text{ml}$)	2	4	4

Test tube racks / microtube racks

Part number	Tube diameter (mm)	Rack capacity
SR-10	10	48
SR-13	13	44
SR-16	16	24
SR-19	19	21
SR-25	25	12
SR-30	30	10
Part number	Microtube size (ml)	Rack capacity
SR-SE	0.5	119
SR-LE	1.5	48



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.