



## DISCOVERY HEAT DETECTOR

Part Number 58000-400

## OPERATING PRINCIPLES

Discovery heat detectors have a common profile with ionisation and optical smoke detectors but have a low air flow resistance case made of self-extinguishing white polycarbonate.

The Discovery Heat Detector uses a single thermistor to sense the air temperature at the detector position. The thermistor is connected in a resistor network, which produces a voltage output dependent on temperature. The design of the resistor network, together with the processing algorithm in the microcontroller, gives an approximately linear characteristic from 10°C to 80°C. This linearised signal is further processed, depending on the response mode selected, and converted to an analogue output.

For the European standard version of the detector, the five modes correspond to five "classes" as defined in EN54-5:2001. The classes in this standard correspond with different response behaviour, each of which is designed to be suitable for a range of application temperatures. All modes incorporate "fixed temperature" response, which is defined in the standard by the "static response temperature". The application temperatures and static response temperatures for all response modes are given in Table 6.

In addition to the basic classification, a detector may be given an "R" or "S" suffix. The "R" suffix indicates that the detector has been shown to have a rate-of-rise characteristic. Such a detector will still give a rapid response even

when starting from an ambient temperature well below its typical application temperature. This type of detector is therefore suitable for areas such as unheated warehouses in which the ambient temperature may be very low for long periods.

The "S" suffix on the other hand indicates that the detector will not respond below its minimum static response temperature even when exposed to high rates of rise of air temperature. This type is therefore suitable for areas such as kitchens and boiler rooms where large, rapid temperature changes are considered normal. ■

### Sectional view - Discovery Heat Detector

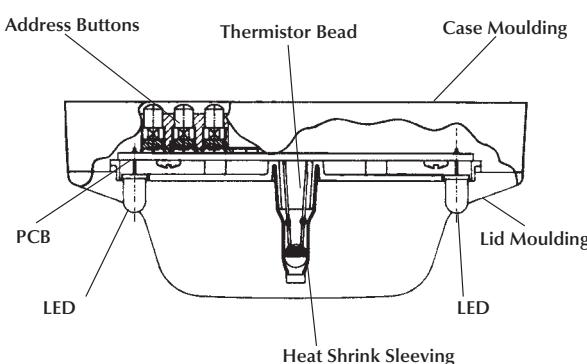


Fig. 5

### Heat Detector Response Modes

Mode	Class (EN54-5:2001)	Application Temperature		Static Response Temperature °C		
		Typical	Max	Min	Typ	Max
1	A1R	25	50	54	57	65
2	A2R	25	50	54	61	70
3	A2S	25	50	54	61	70
4	CR	55	80	84	90	100
5	CS	55	80	84	90	100

For air temperatures in the range 15°C to 55°C, the analogue value for a detector in mode 1 will correspond approximately to the air temperature.

Table 6

## TECHNICAL DATA

## Discovery Heat Detector

Part No 58000-400

Specifications are typical at 24V, 23°C and 50% relative humidity unless otherwise stated.

<i>Detector principle:</i>	Heat sensitive resistance.
<i>Supply wiring:</i>	Two-wire supply, polarity insensitive
<i>Terminal functions:</i>	L1 & L2 supply in and out connections +R remote indicator positive connection (internal 2.2kΩ resistance to positive) -R remote indicator negative connection (internal 2.2kΩ resistance to negative)
<i>Operating voltage:</i>	17–28V DC
<i>Communication protocol:</i>	Apollo Discovery 5–9V peak to peak
<i>Quiescent current:</i>	400µA
<i>Power-up surge current:</i>	1mA
<i>Maximum power-up time:</i>	10s
<i>Alarm current, LED illuminated:</i>	3.5mA
<i>Remote output characteristics:</i>	Connects to positive line through 4.5kΩ (5mA maximum)
<i>Alarm level analogue value:</i>	55
<i>Alarm indicator:</i>	2 red Light Emitting Diodes (LEDs). Optional remote LED
<i>Temperature range:</i>	Maximum operating see Table 6 Minimum operating (no condensation/icing) -40°C Storage -40°C to +80°C
<i>Humidity:</i>	0 to 95% relative humidity (no condensation)
<i>Vibration, Impact and Shock:</i>	To EN54–5:2001
<i>IP rating:</i>	54 in accordance with BSEN60529
<i>Approvals &amp; Standards:</i>	See page 29
<i>Dimensions:</i>	100mm diameter x 42mm height
<i>Weight:</i>	Detector 105g Detector in base 160g
<i>Materials:</i>	Housing: White polycarbonate V–0 rated to UL94 Terminals: Nickel plated stainless steel





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



**UK Office**  
**Keison Products,**  
**P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.**  
**Tel: +44 (0)330 088 0560**  
**Fax: +44 (0)1245 808399**  
**Email: [sales@keison.co.uk](mailto:sales@keison.co.uk)**

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.