




3M™ Protecta® Pro™ Harnesses

For many years the Pro Harness Range has brought workers home safely, whatever their job.

The improved Pro harness design offers the same stringent safety standards but with improved comfort, adjustability, webbing management and functionality. The extensive model range remains as one of the widest in the industry. Whatever your job demands, there is a Pro harness for you.

Applications

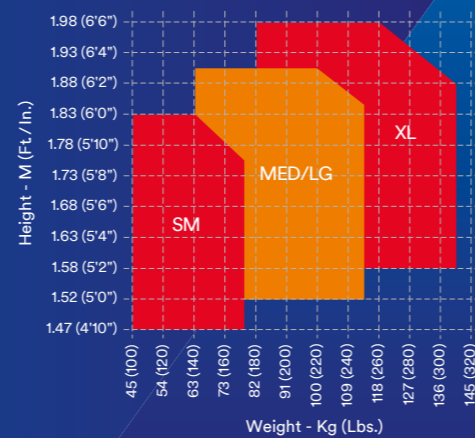

Buckle Options

- Pass Through for simple, safe connection.
- Quick Connect for fast and easily adjustable connection.

Chest Strap

- Optimum position for connection to lanyards and systems.
- Keeps connectors out of the users face.

Spring Loaded Torso Adjusters

- Spring loaded grip bar ensures no webbing slippage.
- Easier to adjust with pull down adjustment.

Webbing Management

- Spare torso webbing stored through hip strap.
- All stitch blocks are away from the body for greater comfort.

Contrasting Leg & Chest Strap

- Reduces donning time.

Sub Pelvic Strap

Large Rear D-ring

- Easier to connect, increased safety.
- Can be used for rescue.

Fall Indicators

Protected Labels

- Protective Velcro® sealed pouch.
- Ensures easy identification and inspection.

Weight Capacity

- 140 kg.



3M™ Protecta® Pro™ Harness

Pro Harness

3M™ Protecta® Pro™ Harness

Pro Harness



	↔	⊖	⊖	kg
AB10112NG	S	PT	PT	1.28
AB10113NG	M/L	PT	PT	1.30
AB10114NG	XL	PT	PT	1.31

	↔	⊖	⊖	kg
AB10212NG	S	PT	PT	1.28
AB10213NG	M/L	PT	PT	1.30
AB10214NG	XL	PT	PT	1.31

	↔	⊖	⊖	kg
AB11312PNG	S	PT	PT	1.38
AB11313PNG	M/L	PT	PT	1.43
AB11314PNG	XL	PT	PT	1.46

	↔	⊖	⊖	⊖	⊖	kg
AB101/19NG	U	PT	PT	2 m	50 mm	2.20
AB101/19UNG	M/L	PT	PT	1.75 m	50 mm	2.20

Pro Harness

Pro Harness

Pro Rescue Harness

Pro Harness with Quick Connect Buckles



	↔	⊖	⊖	kg
AB11212NG	S	PT	PT	1.31
AB11213NG	M/L	PT	PT	1.36
AB11214NG	XL	PT	PT	1.40

	↔	⊖	⊖	kg
AB11312NG	S	PT	PT	1.38
AB11313NG	M/L	PT	PT	1.43
AB11314NG	XL	PT	PT	1.46

	↔	⊖	⊖	kg
AB11312RNG	S	PT	PT	1.20
AB11313RNG	M/L	PT	PT	1.25
AB11314RNG	XL	PT	PT	1.28

	↔	⊖	⊖	kg
AB11712NG	S	QC	QC	1.20
AB11713NG	M/L	QC	QC	1.25
AB11714NG	XL	QC	QC	1.30

3M™ Protecta® Pro™ Harness with Belt



	↔	🔒	🔒	🔒	📊
AB114125NG	S	PT	PT	PT	2.02
AB114135NG	M/L	PT	PT	PT	2.06
AB114145NG	XL	PT	PT	PT	2.15

Pro Harness with Belt



	↔	🔒	🔒	🔒	📊
AB115125NG	S	PT	PT	PT	2.24
AB115135NG	M/L	PT	PT	PT	2.27
AB115145NG	XL	PT	PT	PT	2.31

3M™ Protecta® Pro™ Welders Harness

The Pro Welders Harness is specifically designed to resist the potential heat damage experienced in welding applications. Featuring highly durable heat resistant and flame retardant Modacrylic over Kevlar® webbing and a lightweight design providing the ideal body support solution for welding at height.



5 Points of Adjustment

- Ideally adapts to your body.
- Greater comfort and enhanced safety.

Torso Adjusters

- Simple pull down adjustment.
- Spare webbing stored in hip strap.

Modacrylic Kevlar® webbing

- Heat resistant and flame retardant.
- 370°C char temperature.

Pass Through Steel Buckles

- Simple, safe and fast connection.



Large Rear D Ring

- Easier to connect
- Reduced risk of roll out.

Fall Indicators

- Easy inspection, enhanced safety.

Label Pouch

- Protects identification labels.

Weight Capacity

- 140 kg.

Pro Harness with Belt & Quick Connect Buckles



	↔	🔒	🔒	🔒	📊
AB214325NG	S	QC	QC	QC	2.30
AB214335NG	M/L	QC	QC	QC	2.40
AB214345NG	XL	QC	QC	QC	2.50

Pro Harness with Belt & Quick Connect Buckles



	↔	🔒	🔒	🔒	📊
AB260126NG	S	QC	QC	QC	2.60
AB260136NG	M/L	QC	QC	QC	2.65
AB260146NG	XL	QC	QC	QC	2.70

Pro Welders Harness



	↔	🔒	🔒	📊
AB11313K	M/L	PT	PT	1.30
AB11314K	XL	PT	PT	1.40

Pro Welders Harness



	↔	🔒	🔒	📊
AB10213K	M/L	PT	PT	1.30
AB10214K	XL	PT	PT	1.40