

3M™ Protecta® Nylon Transport Bag



	←-----→	kg
AK043	500 × 300 mm	0.32

Nylon transport bag.

Back Pack



	←-----→	kg
AK053	15 × 30 × 50 cm	0.44

Red and grey back pack.

Duffle Bag



	←-----→	kg
AK066	35 × 20 × 20 cm	0.52

Duffle bag for transport.

Tripod Transport Bag



	kg
AK0100	1.16

Transport bag for AM100 Tripod.

3M™ Protecta® Pro™ Leg Padding



	←-----→	kg
9502120NG	U	0.12

Pack of 2.

3M™ Protecta® Pro™ Harness Shoulder Padding



	←-----→	kg
AK096NG	40 cm	0.17

Removable shoulder padding with lanyard keepers for Pro harness.

Pro Harness Back D-ring Extension Strap



	←-----→	kg
AB011	40 cm	0.19

Back D-ring extension strap 45 mm webbing. Screw gate triangle to attach to harness.

Safety Helmet



	←-----→	kg
AG580	15 × 30 × 50 cm	0.44

Ultra-light protective helmet with an extremely comfortable three-point chin strap.

3M™ Protecta® Pro-Stretch™ Lanyard



- Built in energy absorber – no bulky shock pack
- Elasticated tube web reduces trip hazard & damage through abrasion
- Identification labels protected from damage or removal
- Activation indicator easily identifies a deployed lanyard

		⚙️		⚙️		CE EN355		
	←-----→	⊘	⊘	⊘	⊘	⊘	kg	
AE5215SAA	1.5 m	⊘	17 mm	(S)	⊘	17 mm	(S)	0.63
AE5215SAK	2 m	⊘	17 mm	(S)	⌘	60 mm	(A)	0.91
AE5220SAA	2 m	⊘	17 mm	(S)	⊘	17 mm	(S)	0.74
AE5220SAK	2 m	⊘	17 mm	(S)	⌘	60 mm	(A)	1.03

Pro-Stretch™ Lanyard - Edge Tested



- Tested over a 0.50 mm Radius edge
- Enhanced protection for workers exposed to working over edges
- Two layers of tube webbing offer exceptional product life & durability
- Available with Twist Lock or Triple Lock carabiner body connector for even greater security
- Differentiated from standard Pro-Stretch Lanyard - Edge Tested by orange edging to label pouch and black striped tube webbing
- Various connectors are available depending on the needs of the user ranging from standard carabiners to large opening scaffold hooks

		⚙️		⚙️		CE EN355		
	←-----→	⊘	⊘	⊘	⊘	⊘	kg	
AE5220SBB/SE	2 m	⊘	17 mm	(S)	⊘	18 mm	(S)	0.79
AE5220SBK/SE	2 m	⊘	17 mm	(S)	⌘	60 mm	(A)	1.08
AE5220SYK/SE	2 m	⊘	17 mm	(S)	⌘	60 mm	(A)	1.08

3M™ Protecta® Sanchoc™ Energy Absorber



		CE EN355
	kg	
AE521	0.32	

3M™ Protecta® Sanchoc™ Shock Absorbing Lanyard - Tie Back



		⚙️		⚙️		CE EN355		
	←-----→	⊘	⊘	⊘	⊘	⊘	kg	
AE5215TAK	1.5 m	⊘	17 mm	(S)	⌘	60 mm	(A)	1.70
AE5315TAK	1.5 m	■	17 mm	(S)	⌘	60 mm	(A)	2.00

3M™ Protecta® Sanchoc™ Webbing Lanyard



- Supple & flexible webbing offers great ease of use
- Highly abrasion resistant 45 mm webbing
- Terminations sewn with high strength polyester thread
- Identification labels protected within transparent shock pack cover
- Wide range of designs and connector options available

	↔	EW	🔗			🔗			CE EN355
			🔗	🔗	🔗	🔗	🔗	🔗	kg
AE529/1	1.5 m		🔗	17 mm	Ⓢ	🔗	17 mm	Ⓢ	0.73
AE529/61	1.5 m		🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.00
AE529	2 m		🔗	17 mm	Ⓢ	🔗	17 mm	Ⓢ	0.77
AE529/6	2 m		🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.08
AE529E/5	2 m	■	🔗	18 mm	Ⓢ	🔗	50 mm	Ⓢ	1.16

3M™ Protecta® Sanchoc™ Kernmantle Rope Edge - Tested Lanyard



- Tested over a 0.50 mm Radius edge
- Enhanced protection for workers exposed to working over edges
- 12.50 mm Kernmantle rope offers exceptional durability and product life
- Available with Twist Lock carabiner body connector for even greater security
- Differentiated from standard Sanchoc kernmantle rope lanyards by Orange colour yarn

	↔	🔗	🔗	🔗			🔗			CE EN355
				🔗	🔗	🔗	🔗	🔗	🔗	kg
AE5220REK/SE	2 m		1	🔗	19 mm	Ⓢ	🔗	60 mm	Ⓐ	1.25
AE5315REK/SE	1.5 m	■	2	🔗	19 mm	Ⓢ	🔗	60 mm	Ⓐ	1.80
AE5220RBB/SE	2 m		1	🔗	18 mm	Ⓢ	🔗	18 mm	Ⓢ	0.90
AE5220RBK/SE	2 m		1	🔗	18 mm	Ⓢ	🔗	60 mm	Ⓐ	1.40

3M™ Protecta® Sanchoc™ Kernmantle Rope Lanyard



- 10.50 mm diameter kernmantle rope leg material
- Rope terminations sewn with high strength polyester thread
- Identification labels protected within transparent shock pack cover
- Wide range of designs and connector options available

	↔	🔗	🔗	🔗			🔗			CE EN355
				🔗	🔗	🔗	🔗	🔗	🔗	kg
AE522/13	1.5 m		1	🔗	19 mm	Ⓢ	🔗	19 mm	Ⓢ	0.85
AE522/15	1.5 m		1	🔗	19 mm	Ⓢ	🔗	50 mm	Ⓢ	1.13
AE522/1	1.5 m		1	🔗	17 mm	Ⓢ	🔗	17 mm	Ⓢ	0.77
AE522/3	2 m		1	🔗	19 mm	Ⓢ	🔗	19 mm	Ⓢ	0.88
AE522/5	2 m		1	🔗	19 mm	Ⓢ	🔗	50 mm	Ⓢ	1.16
AE522/6	2 m		1	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.10
AE525	Adj. 2 m		1	🔗	17 mm	Ⓢ	🔗	17 mm	Ⓢ	0.86
AE525/1	Adj. 2 m		1	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.22
AE5310RAK	1 m	■	2	🔗	17 mm	Ⓢ	🔗	60 mm	Ⓐ	1.60
AE532/31	1.30 m	■	2	🔗	19 mm	Ⓢ	🔗	50 mm	Ⓢ	1.74
AE532/2	1.50 m	■	2	🔗			🔗			0.54
AE5318RAK	1.80 m	■	2	🔗	17 mm	Ⓢ	🔗	60 mm	Ⓐ	1.60
AE532/1	1.80 m	■	2	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.75
AE532/3	1.80 m	■	2	🔗	19 mm	Ⓢ	🔗	50 mm	Ⓢ	1.73

3M™ Protecta® Restraint Lanyard



Protecta rope connecting lanyards are an ideal solution for the connecting element in a restraint system. Made from polyamide braided rope with safety stitching. Rope diameter 10.50 mm.

	↔	🔗	🔗			🔗			CE EN354
			🔗	🔗	🔗	🔗	🔗	🔗	kg
AL410B	1 m	1	-	-	-	-	-	-	0.11
AL410C	1 m	1	🔗			🔗			0.16
AL410C2	1 m	2	🔗			🔗			0.87
AL415B	1.5 m	1	-	-	-	-	-	-	0.15
AL415C	1.5 m	1	🔗			🔗			0.19
AL420B	2 m	1	-	-	-	-	-	-	0.18
AL420C	2 m	1	🔗			🔗			0.22
AL420C1	2 m	1	🔗	17 mm	Ⓢ	🔗	17 mm	Ⓢ	0.63
AL420C2	2 m	1	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	0.91
AL4000	1.8 m	1	🔗			🔗			0.23
AL432	1 m	2	-	-	-	-	-	-	0.25
AL432/1	1.3 m	2	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.39

3M™ Protecta® Work Positioning Lanyard - Trigger



The Protecta adjustment system has been improved to give the option to easily adjust the length of the lanyard during use.

These versions have a triple action carabiner AJ572 with a zinc plated steel snaphook (ref: AJ523) and are available in different lengths. Max weight capacity: 140 kg.

	↔	∅	⚙️			⚙️			⚖️
1200314	Adj to 2 m	10.5 mm	⚙️	21 mm	Ⓢ	⚙️	24 mm	Ⓐ	0.85
1200317	Adj to 3 m	10.5 mm	⚙️	21 mm	Ⓢ	⚙️	24 mm	Ⓐ	0.92
1200315	Adj to 4 m	10.5 mm	⚙️	21 mm	Ⓢ	⚙️	24 mm	Ⓐ	0.99

CE EN358

3M™ Protecta® Rope Work Positioning Lanyard - Adjustable




Braided rope work positioning lanyards available in a variety of diameters and connector combinations.

	↔	∅	⚙️			⚙️			⚖️
AL422	Adj. 2 m	10.5 mm	-	-	-	-	-	-	0.28
AL422/3	Adj. 2 m	10.5 mm	⚙️	17 mm	Ⓢ	⚙️	50 mm	Ⓐ	1.00
AL423/5	Adj. 2 m	12.5 mm	⚙️	17 mm	Ⓢ	⚙️	17 mm	Ⓢ	0.80

CE EN358

3M™ Protecta® Manustop™ Rope Work Positioning Lanyard

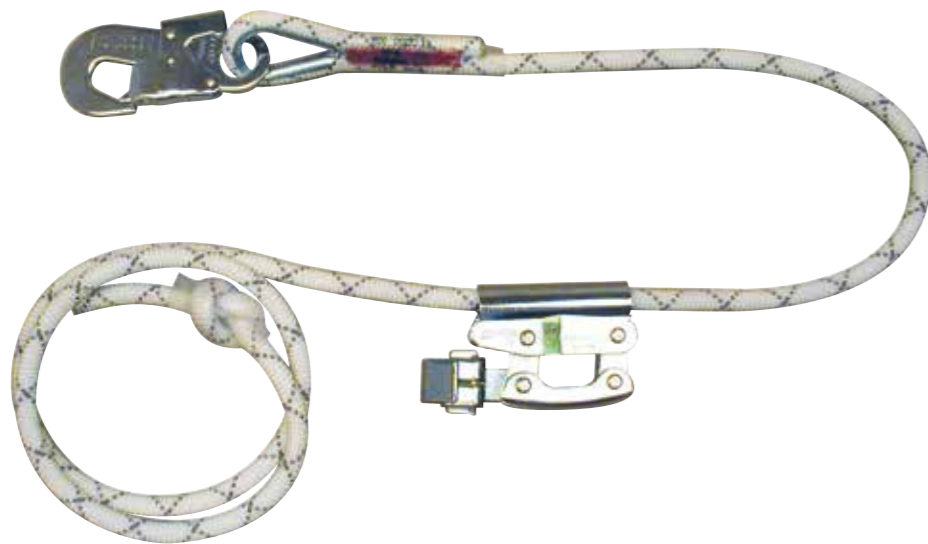

Manustop Rope work positioning lanyards available in a variety of lengths and connector combinations.

	↔	∅	⚙️			⚙️			⚖️
AF764T2	Adj. 2 m	12 mm	⚙️	17 mm	Ⓢ	⚙️	17 mm	Ⓢ	1.01
AF795T2	Adj. 2 m	12 mm	⚙️	50 mm	Ⓢ	⚙️	50 mm	Ⓢ	1.32

CE EN354

CE EN358

3M™ Protecta® Web Work Positioning Lanyard



Web work positioning 45 mm lanyard, particularly suited to work on posts (wood or concrete). Easy to adjust roll bar buckle, even with one hand. Rigid section to facilitate passing the end of the strap around the pole.

	↔	∅	⚙️			⚙️			⚖️
AF725	2.5 m	17 mm	⚙️	17 mm	Ⓢ	⚙️	17 mm	Ⓢ	0.80

CE EN358