



SoundEar®3

Measure, monitor and manage
the noise with SE3-310

SoundEar®3 - 310 Specifications

Parameters:	Measures 3 measurements simultaneously LAF; LAS; LCpeak; Laeq 1s, Laeq 1/4 h, Laeq 1/2h, Laeq 1 h.
Resolution:	0,1 dB for all parameters
Measuring Ranges:	RMS: Total 30 - 120 dB
Deviation:	+/- 0,5 dB
Frequency Range:	20Hz- 20 kHz
Frequency Weightings:	A- weighting (RMS), C-weighting (Peak)
Time Weighting:	Slow(1S) & Fast (125 ms)
Dynamic Range:	90 dB and peak detection
Light setting:	full configurability through Soundear software including nightsetting.
2 x outputs :	0-10 V or 4-20 mA
2 xUSB outputs:	Micro USB (power & PC) , USB OTG (Log, configuration)
Display setting:	LAS max, Leq (A)15, Alarm settings, Temperature & Clock
Power Supply:	5VDC (Micro USB) / 24VDC (Screw terminal)
Current Consumption:	max 2,5 W
Internal memory:	16 MB(128 Mbit) (5-90 days log time, depending on log settings)

Real Time Clock:	Hi-precision type with battery backup (CR2032)
Microphone:	20 Hz- 20 kHz
Measurement 300 - 310:	Length 256 mm, Width: 205 mm, Height: 45 mm, Weight: 1,5 kg
Standards:	IEC61672-2-2002, Type 2, ANSI 51,4 Type 260601-1: Medical elec- trical equipment- Part 1: general requirements for basic safety and essential performance. 60601-1-2_ Medical equipment - Part 1.2: General requirement - Part 1-2: General requirement for Basic safety and essential performance.
Connectivity accessories:	GSM module, 4 G module for Cloud solution




The mini display on SoundEar®3 - 300 and 310 is operated manually via the touch panel on the front of the cabinet.



External microphone.



USB key for export of data.

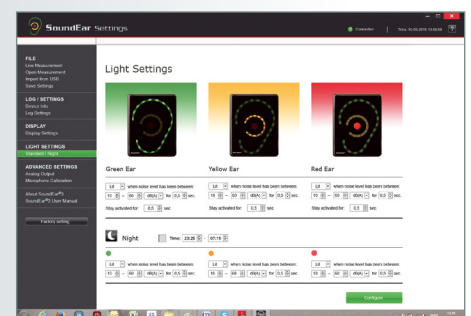

SoundEar®3 software





Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office

Keison Products,

P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.

Tel: +44 (0)330 088 0560

Fax: +44 (0)1245 808399

Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.