




GENERAL MONITORS

Protection for life.

MODEL DT210

Eight-Channel Readout/Relay Module

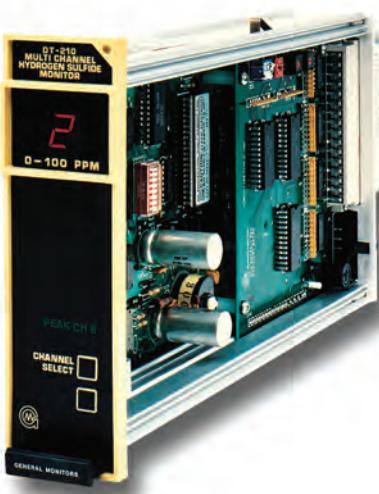

Features

- Compact Packaging
- Large Digital Display
- LED Readouts for Each Channel
- Common Relays
- Safe, Easy Calibration

Benefits

- Requires less panel or cabinet space
- Provides clear display of the Peak Channel Reading
- Shows the status of each channel including Alarms, Calibration, Malfunction, and Reset
- Indicates ALARM, WARN, & MALFunction Alarms
- Longer product life

Description

The Model DT210 is an eight-channel Readout/Relay Module designed to be used with up to eight remotely located General Monitors H₂S Smart Sensors. The front panel contains a digital display that indicates 0-20 ppm (parts per million), 0-50 ppm, or 0-99 ppm of the gas being monitored by the Intelligent Sensors.

Each of the eight H₂S Smart Sensors is also provided with open collector outputs from the DT210 for the ALARM, WARN, and MALFunction conditions. These open collector outputs are referenced to DC return and will sink a maximum of 100mA when active. The open collector outputs are capable of handling external circuitry within a voltage range of 3 to 50 VDC.

Recommended uses for the open collector outputs include external relay circuit when contact closures are desired for each Smart Sensor; external logic interface (TTL, CMOS, HTL, etc.) to a central computer or control room, and external test circuitry.

The Model DT210 can be supplied with a special voting option which must be specified when ordering. A system supplied with this option will require that two channels reach the alarm setpoint before the alarm relay will actuate. All other functions remain the same.

Applications

- Chemical and Petrochemical Plants
- Desulfurization Facilities
- Drilling Platforms and Rigs
- Gas and Oil Production Platforms
- Mud-logging Operations
- Oil Recovery/Reinjection
- Refineries
- Wastewater Treatment Plants
- Wellhead Sites



MODEL DT210

System Specifications

Input Current:	0-20mA from S4000TH
Display Range:	0-99 ppm, flashing 99 for over-range indication
Accuracy:	± 2ppm or 10% of the applied gas, whichever is greater
Front Panel Switches:	Channel select, Reset
Alarm Disable:	9 position rotary switch
Alarm Setting:	16 position rotary switch
Warning Setting:	16 position rotary switch
Alarm & Warn LED test:	Incorporated with Reset switch (hold over one second)
Voting:	Jumper selectable - option - one or two channels ALARM only
Energized/ De-Energized Relay Options:	ALARM and WARN set by DIP switch
Latching/ Non-Latching Relay Options:	ALARM and WARN set by DIP switch
Channel Enable:	Set by DIP switch for each channel
Reset:	One momentary push button switch
Remote Reset:	Yes
Electrical Classification:	General purpose, non-hazardous areas
Warranty:	Two years
Approvals:	CSA, FM

Environmental Specifications

Operating Temperature Range:	32°F to 140°F (0°C to 60°C)
Storage Temperature Range:	-28°F to 130°F (-33°C to 54°C)
Operating Humidity Range:	10-95% non-condensing

Electrical Specifications

Input Power:	22-30 VDC 8 watts DT210 plus 7 watts for each S4000TH
Channel Input Resistance:	125 ohms maximum
Output Power:	24 VDC nominal at 0.25 amp to each S4000TH
Status Indicators:	RESET,  , 8 Discrete indicators for ALARM, WARNING, MALFunction, CALIBRATE, PEAK Channel
Relay Ratings:	4A @ 250 VAC / 30V RMS/42.4 peak, 3A @ 30 VDC, resistive max. A1, A2 - DPDT Fault-SPDT
Cable Requirements:	4 wire shielded cable. Max. allowable distance between sensor and DT210 with one way resistance of 4 ohms (total 8 ohms) @24 VDC nominal: 14 AWG-1500 ft. (700m)

Mechanical Specifications

Dimensions:	2.1" w x 6.9" h x 11.5" d (53mm x 175mm x 294mm)
Weight:	Approx. 3.8 lb. (1.8kg)
Mounting Configurations:	Rack, Panel, Wall, & Explosion-proof Enclosures
Standard Configuration:	DT210-1-1-2-8 Latch alarm, non-latch warn, de-energized, 99 ppm, voting off, 8 active channels

Specifications subject to change without notice.

Represented by:



Thank you for reading this data sheet.

For pricing or for further information, please contact us at our UK Office, using the details below.



UK Office
Keison Products,
P.O. Box 2124, Chelmsford, Essex, CM1 3UP, England.
Tel: +44 (0)330 088 0560
Fax: +44 (0)1245 808399
Email: sales@keison.co.uk

Please note - Product designs and specifications are subject to change without notice. The user is responsible for determining the suitability of this product.